

N**ORTHTECH**

Machine, LLC

NT-ES1260SE EDGE SANDER



**Key Machine LLC
1769 Harrisville Rd
Stoneboro PA 16153
sales@keymachinellc.com
724-301-0545**

NORTHTECH

Machine, LLC

NT-ES1260SE EDGE SANDER

- 7.5HP main motor; 3PH, 230V/460V Dual Voltage
- Sanding belt size: 12" x 165" (Included)
- Platen size: 13" x 60"
- 12mm (1/2") oscillating stroke
- Drive wheel: 7" x 13"
- Easy elevation control through manual worm gear
- Side table dimensions: 10-3/8" x 60-11/16"
- Side table tilt 0° - 45°
- End table dimensions: 13-3/4" x 16-1/2"
- End table tilt: 0° - 45°
- Sanding belt speed: 60HZ, 3200 FPM
- Dust ports: (2) 4" requiring 436 CFM @ point of extraction
- Easy jig fences are standard for squaring accuracy and part stability
- Machine Dimensions: 82" x 25" x 49"
- Packaging Dimensions: 86" x 30" x 56"
- Net weight: 895lbs
- Gross weight: 1,195lbs
- (1) Tool box
- Standard Northtech 1 year parts warranty
- Northtech offers a full line of dust collectors for any application.
- All machines are tested stateside prior to shipment providing trouble free start up.




* Any shipping date quoted by Northtech is an estimation based on factory delivery. Northtech cannot guarantee delivery, nor do we assume any liability for delays or non-shipment arising from any cause. Pictures are for reference only, design and specifications of all Northtech Products sold are subject to change without notice.*

Machine Features



BELT TENSIONER ADJUSTMENT

- Quick and easy access to belt adjustments.
 - Rollers are precision balanced for vibration free operation.
-

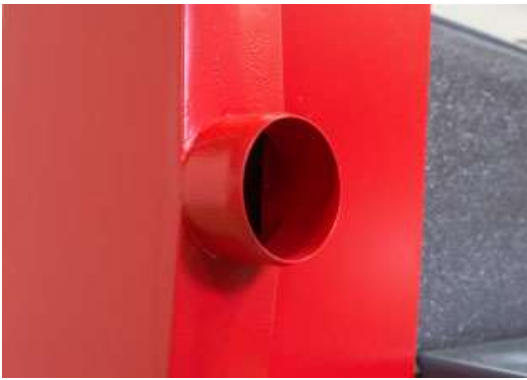

DUST HOODS / GUARDS

- Northtech utilizes dual end guards for full dust control, and operator safety.
-



OSCILLATING

- Northtech Edge Sanders employ a direct oscillation drive gear for reduced energy consumption and more dependability over pneumatic systems.
-



BASE

- Heavy duty base is a cast constructed frame for vibration reduction and stability when working.

Machine Features



BACKER

- Full graphite backer allows total use of sandbelt.



TILT

- All Northtech side tables are tiltable from 0-45°.
- Position is held by double locking speed handles.



TABLE ELEVATION

- Table is raised and lowered individually through a synchronized dual shaft worm gear elevation system.
- 6" of elevation



CENTRAL CONTROL STATION

- Controls conveniently located, and equipped with operational lights.

Machine Features



Db Rating

- This machine has a 79 db rating when running.



TOOL BOX AND MANUAL

- Tool box including applicable tools as well as operator manual are included.



OPTIONAL

- Double sided table for an additional work cell comes with 10HP upgrade to prevent belt stalls during simultaneous sanding operations.
- Side table dimensions: (2) 10-3/8" x 60-11/16"
- Sanding belt size 12" x 165" (included)
- Machine / Packing Dimensions: 83" x 29" x 49" / 87" x 34" x 56"
- Net / Gross Weight: 1,110 lbs. / 1,340 lbs.

NORTHTECH

Machine, LLC



(NT 1260DE photos shown)



102 Walnut Street
Borden, IN 47106
(812) 967-7400 Fax (812) 967-7401
www.NorthtechMachine.com info@NorthtechMachine.com